



# 75" Professional LED Backlit LCD Display

Model: CID-IM-75



## INTRODUCTION

75-inch professional LCD display adopts LED full-array backlight panels, with more delicate image quality and clearer definition. Independently developed ultrathin board design let body more lightweight.


Ultra-narrow aluminum frame design let its frame up to 30mm. Its great heat dissipation function guarantees the 7x24 hours of continuous work, which is widely used in advertising, video conferencing, classroom and other industries.

## FEATURES

- Single display applications of large sizes, 43", 55", 65", 75", 86", 98";
- Professional grade LCD displays with LED backlit with lifespan 100,000hr;
- Aluminum frame with narrow bezel 28mm & bezel colors customized available;
- Designed for 24/7 usage;
- FHD 1920x1080 & Ultra HD 3840x2160 display resolution makes perfect and vivid picture;
- PC expansion slots, easy to input/output the audio video signal;
- With the smart power energy saving function, the stand-by power consumption can be 0.5W.



## DIAGRAM

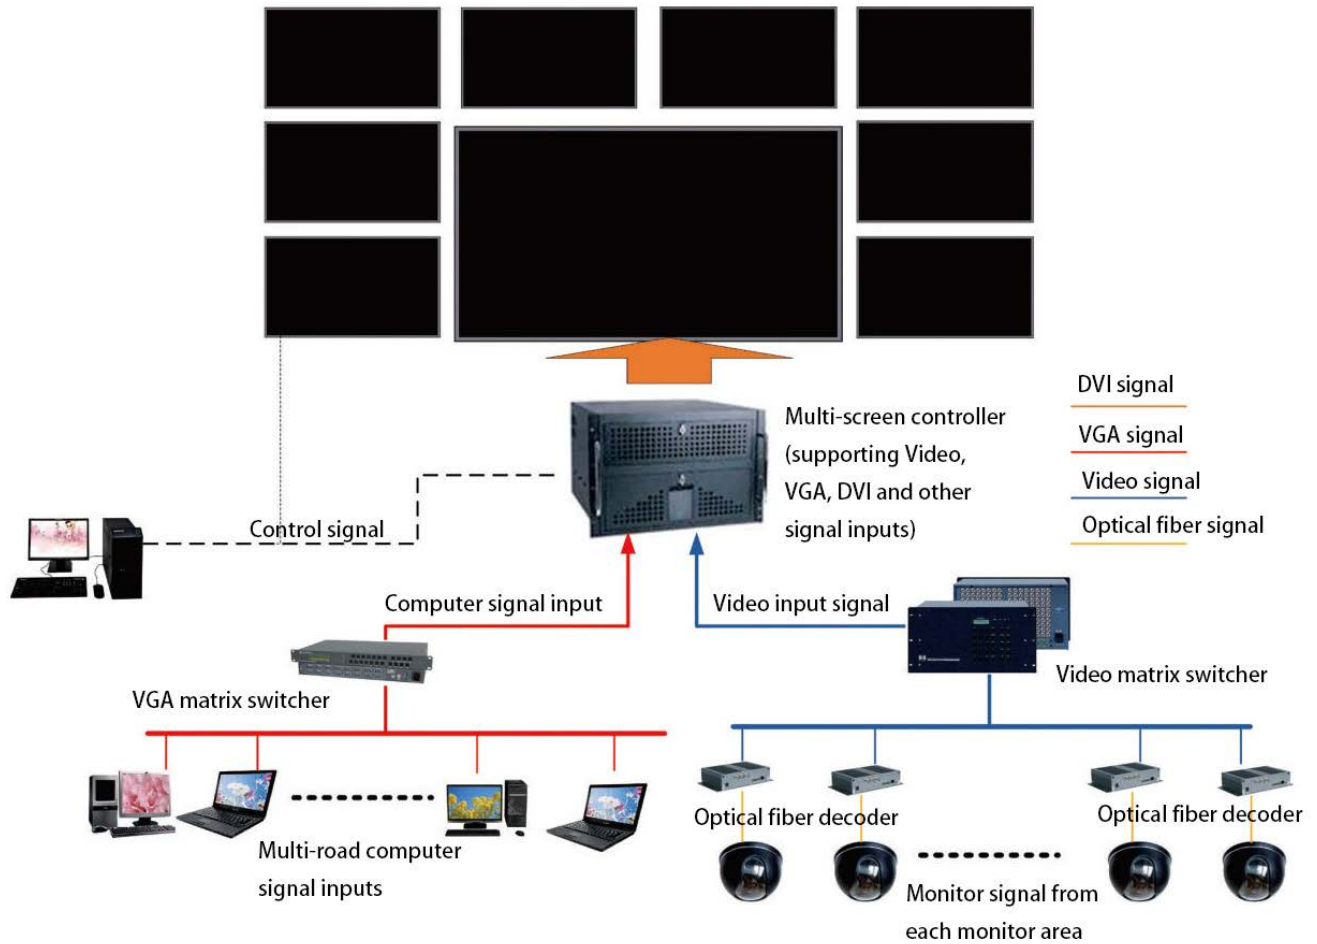

## APPLICATION



**SPECIFICATIONS**

<b>Model</b>	<b>CID-IM-75</b>
<b>Size (inch)</b>	<b>75"</b>
<b>Backlight</b>	<b>DLED</b>
<b>NetWeight</b>	<b>30KG</b>
<b>Contrast Ratio</b>	<b>1200:1</b>
<b>Response time</b>	<b>8ms</b>
<b>Viewing Angle</b>	<b>178°/178°</b>
<b>Power Consumption</b>	<b>&lt;400W</b>
<b>Brightness (cd/ m<sup>2</sup>)</b>	<b>450</b>
<b>Resolution</b>	<b>4K@60Hz</b>
<b>Bilateral Border</b>	<b>1.07B</b>
<b>Signal input</b>	<b>HDMI / DVI / VGA / AV / RS232 / Y/Pb/Pr / DP / LAN / OPS / USB2.0 / USB3.0</b>
<b>Aspect Ratio</b>	<b>16:9</b>
<b>Power Supply</b>	<b>100-240VAC, 50/60 Hz</b>
<b>Control method</b>	<b>RS232/RJ45,IR</b>